









REV.	ENR. NO.	LOCATION	DESCRIPTION	DATE



- NOTE:
- MATERIAL:
HOUSING:THERMOPLASTIC BLACK UL94V-0.
RJ CONTACT:PHOSPHOR BRONZE T=0.35mm.
SHELL: COPPY ALLOY T=0.20mm.
LED PIN: T=0.50mm.
 - FINISH:
RJ CONTACT: AU/100u" SN/50u" NI PLATED
SHELL: NI PLATED
 - MECHANICAL CHARACTERISTICS:
INSERTION FORCE : 22N MAX.
REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.
PLUG LOCKING RETENTION FORCE : 50N MIN./60sec
DURABILITY : 750 TIMES
4. OPERATING TEMPERATURE : 0°C ~ 70°C
5. ①-② FOR QIP DIM.

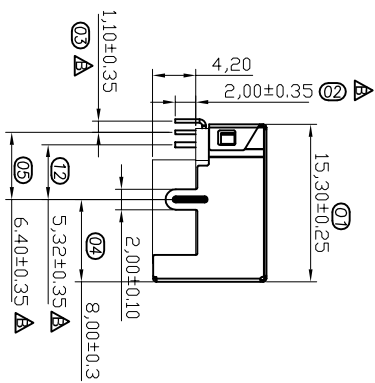


脚位尺寸以过孔规范为准

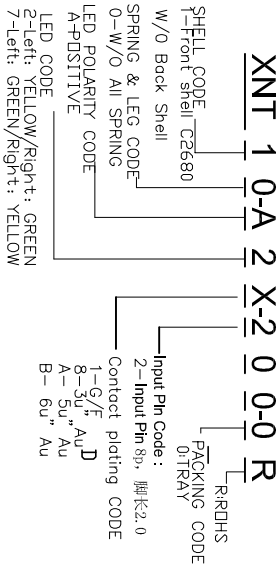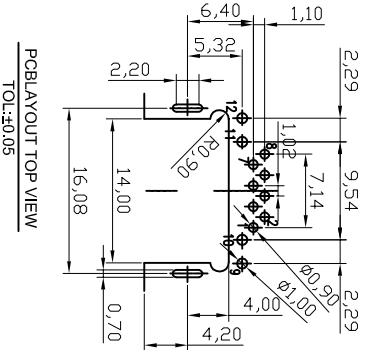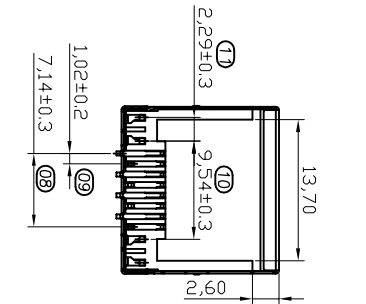

PIN 脚定义:

PIN位	Name	Description
P1	TX+	Transceive Data+ (数据发送正端)
P2	TX-	Transceive Data- (数据发送负端)
P3	RX+	Receive Data+ (数据接收正端)
P4	N/C	Not connected (空脚)
P5	N/C	Not connected (空脚)
P6	RX-	Receive Data- (数据接收负端)
P7	N/C	Not connected (空脚)
P8	N/C	Not connected (空脚)

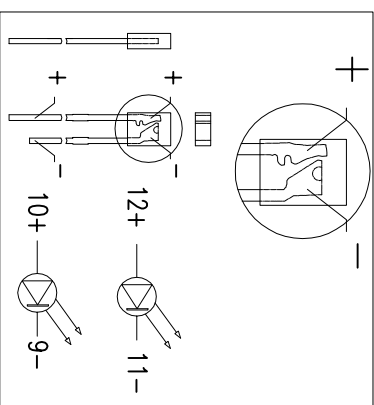

深圳市鑫南天科技有限公司

Shen zhen Shi Xin Nan Tian Technology Co., Ltd

DIMENSIONS INT:	mm	DRAWING:	COCO	DATE:	2016/04/16
UNLESS OTHERWISE SPECIFIABLE		CHECK:	JANY	DATE:	2016/04/16
TOLERANCE UNSPECIFIED	X ± 0.35	APPROVED:	JEFF	DATE:	2016/04/16
	.XX ± 0.25	SCALE:	1:1	DWG ID:	P D
	.XXX ± 0.15	REV:	A	PAGE:	1 of 1

PRODUCT NAME (产品描述):	RJ45 沉板4.2 带壳带灯 8脚DIP
PRODUCT NO. (产品料号):	XNT10A2X2000R
DRAWING NO. (图号):	XNT-RJ-0000156